


Prepared For:

City of Sparks
Ron Korman
431 Prater Way
Sparks, NV 89431-4598
(775)353 - 2347
Reference ID: N/A

Presented By:

SILVER STATE INTL
Ryan Parkins
2255 LARKIN CIRCLE
SPARKS NV 89431 -
(775)685-6000

Thank you for the opportunity to provide you with the following quotation on a new International truck. I am sure the following detailed specification will meet your operational requirements, and I look forward to serving your business needs.

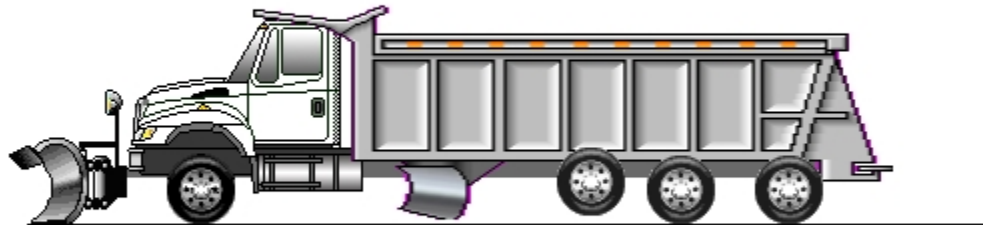

Model Profile
2020 HV607 SBA (HV607)

AXLE CONFIG:	6X4
APPLICATION:	Front Plow and Underbelly Scraper with Spreader
MISSION:	Requested GVWR: 58000. Calc. GVWR: 78350 Calc. Start / Grade Ability: 33.33% / 2.43% @ 55 MPH Calc. Geared Speed: 70.5 MPH
DIMENSION:	Wheelbase: 264.00, CA: 196.90, Axle to Frame: 55.00
ENGINE, DIESEL:	{Cummins L9 370} EPA 2017, 370HP @ 2000 RPM, 1250 lb-ft Torque @ 1400 RPM, 2100 RPM Governed Speed, 370 Peak HP (Max)
TRANSMISSION, AUTOMATIC:	{Allison 4500 RDS} 5th Generation Controls, Wide Ratio, 6-Speed with Double Overdrive, with PTO Provision, Less Retarder, Includes Oil Level Sensor, On/Off Highway
CLUTCH:	Omit Item (Clutch & Control)
AXLE, FRONT NON-DRIVING:	{Meritor MFS-20-133A} Wide Track, I-Beam Type, 20,000-lb Capacity
AXLE, REAR, TANDEM:	{Meritor RT-46-164P} Single Reduction, Standard Width, 46,000-lb Capacity, with Lube Oil Pump, Driver Controlled Locking Differential in Forward-Rear and Rear-Rear Axle, 200 Wheel Ends Gear Ratio: 5.38
CAB:	Conventional, Day Cab
TIRE, FRONT:	(2) 315/80R22.5 Load Range L HAU 3 WT (CONTINENTAL), 480 rev/mile, 68 MPH, All-Position
TIRE, REAR:	(8) 11R22.5 Load Range G ENDURANCE RSA (GOODYEAR), 496 rev/mile, 75 MPH, All-Position
SUSPENSION, REAR, TANDEM:	{Hendrickson HMX-460-54} Walking Beam, 46,000-lb Capacity, 54" Axle Spacing, Rubber Springs, with Transverse Torque Rods, Rubber End Bushings
FRAME REINFORCEMENT:	Full Outer C-Channel, Heat Treated Alloy Steel (120,000 PSI Yield), 10.813" x 3.892" x 0.312" (274.6mm x 98.8mm x 7.9mm), 480.0" (12192mm) OAL
PAINT:	Cab schematic 100WL Location 1: 9219, Winter White (Std) Chassis schematic N/A

<u>Code</u>	<u>Description</u>
HV60700	Base Chassis, Model HV607 SBA with 264.00 Wheelbase, 196.90 CA, and 55.00 Axle to Frame.
1AND	AXLE CONFIGURATION {Navistar} 6x4
	<u>Notes</u> : Pricing may change if axle configuration is changed.
1CBU	FRAME RAILS Heat Treated Alloy Steel (120,000 PSI Yield); 10.125" x 3.580" x 0.312" (257.2mm x 90.9mm x 8.0mm); 480.0" (12192) Maximum OAL
1GBP	FRAME REINFORCEMENT Full Outer C-Channel, Heat Treated Alloy Steel (120,000 PSI Yield), 10.813" x 3.892" x 0.312" (274.6mm x 98.8mm x 7.9mm), 480.0" (12192mm) OAL
1LLA	BUMPER, FRONT Swept Back, Steel, Heavy Duty
1UAN	FRAME EXTENSION, FRONT Integral; 27" In Front of Grille, with Outer C-Channel Reinforcement
1WDU	CROSSMEMBER, FRONT for Hydraulic Pump, Mounting Flange to Accommodate Pump
1WGZ	WHEELBASE RANGE 264" (670cm) Through and Including 311" (790cm)
2ARY	AXLE, FRONT NON-DRIVING {Meritor MFS-20-133A} Wide Track, I-Beam Type, 20,000-lb Capacity
3770	SPRINGS, FRONT AUXILIARY Rubber
3ACS	SUSPENSION, FRONT, SPRING Multileaf, Shackle Type, 20,000-lb Capacity, Less Shock Absorbers
4091	BRAKE SYSTEM, AIR Dual System for Straight Truck Applications
	<u>Includes</u> : BRAKE LINES Color and Size Coded Nylon : DRAIN VALVE Twist-Type : GAUGE, AIR PRESSURE (2) Air 1 and Air 2 Gauges; Located in Instrument Cluster : PARKING BRAKE CONTROL Yellow Knob, Located on Instrument Panel : QUICK RELEASE VALVE On Rear Axle for Spring Brake Release: 1 for 4x2, 2 for 6x4 : SLACK ADJUSTERS, FRONT Automatic (with Air Cam Brakes) : SLACK ADJUSTERS, REAR Automatic (with Air Cam Brakes) : SPRING BRAKE MODULATOR VALVE R-7 for 4x2, SR-7 with relay valve for 6x4/8x6
4619	TRAILER CONNECTIONS Four-Wheel, with Hand Control Valve and Tractor Protection Valve, for Straight Truck
	<u>Notes</u> : When electronic stability control is ordered with trailer connections on a 4x2 truck, please check the operator manual for trailer weight restrictions.
4AZA	AIR BRAKE ABS {Bendix AntiLock Brake System} Full Vehicle Wheel Control System (4-Channel)
4EBT	AIR DRYER {Bendix AD-IP} with Heater
4JBR	BRAKES, AIR CAM, PUSHER AXLE S-Cam; 15" x 4.0"; Includes MGM 20 Sq.In. Brake Chambers; Furnished with One Pusher Lift Axle
4JCC	BRAKES, REAR, AIR DISC 22.5 Dia, Includes 18/24" Sq. In. Brake Chambers
4JCN	BRAKES, FRONT, AIR DISC 22.5 Dia, Includes 20" Sq. In. Brake Chambers
4SPA	AIR COMPRESSOR {Cummins} 18.7 CFM
4VKC	AIR DRYER LOCATION Mounted Inside Left Rail, Back of Cab
4VKK	AIR TANK LOCATION (2) Mounted Under Battery Box, Outside Right Rail, Back of Cab, Perpendicular to Rail
4WDA	DRAIN VALVE (3) Petcocks, for Air Tanks
4WDU	HAND CONTROL VALVE, AIR for Trailer Brakes, Omit Item

<u>Code</u>	<u>Description</u>
4WEY	BRAKE PACKAGE, REAR {Bendix Spicer ADB22X} Air, Disc Type, Extended Service; Size 22.5"
4WEZ	BRAKE PACKAGE, FRONT {Bendix Spicer ADB22X} Air, Disc Type, Extended Service; Size 22.5"
4WHN	DUST SHIELDS, REAR BRAKE {Bendix Spicer ADB22X} Pad, with Air Disc Brakes
5710	STEERING COLUMN Tilting and Telescoping
5CAW	STEERING WHEEL 4-Spoke; 18" Dia., Black
5PTB	STEERING GEAR (2) {Sheppard M100/M80} Dual Power
6DGT	DRIVELINE SYSTEM {Dana Spicer} SPL170 Main Driveline with SPL170 Interaxle Shaft, for 6x4
7BEU	AFTERTREATMENT COVER Aluminum
7BKS	EXHAUST SYSTEM Single, Horizontal Aftertreatment Device, Frame Mounted Right Side Under Cab, for Single Vertical Tail Pipe, Frame Mounted Right Side Back of Cab
7WBA	TAIL PIPE (1) Turnback Type, Bright
7WDM	EXHAUST HEIGHT 10'
7WDN	MUFFLER/TAIL PIPE GUARD (1) Aluminum
8000	ELECTRICAL SYSTEM 12-Volt, Standard Equipment
	<u>Includes</u>
	: DATA LINK CONNECTOR For Vehicle Programming and Diagnostics In Cab
	: HAZARD SWITCH Push On/Push Off, Located on Instrument Panel to Right of Steering Wheel
	: HEADLIGHT DIMMER SWITCH Integral with Turn Signal Lever
	: PARKING LIGHT Integral with Front Turn Signal and Rear Tail Light
	: STARTER SWITCH Electric, Key Operated
	: STOP, TURN, TAIL & B/U LIGHTS Dual, Rear, Combination with Reflector
	: TURN SIGNAL SWITCH Self-Cancelling for Trucks, Manual Cancelling for Tractors, with Lane Change Feature
	: WINDSHIELD WIPER SWITCH 2-Speed with Wash and Intermittent Feature (5 Pre-Set Delays), Integral with Turn Signal Lever
	: WINDSHIELD WIPERS Single Motor, Electric, Cowl Mounted
	: WIRING, CHASSIS Color Coded and Continuously Numbered
8518	CIGAR LIGHTER Includes Ash Cup
8541	HORN, ELECTRIC (2) Disc Style
8875	BATTERY TERMINALS Sealed
8GGG	ALTERNATOR {Delco Remy 36SI} Brushless, 12 Volt 165 Amp. Capacity, Pad Mount, with Remote Voltage Sensor
8HAE	BODY BUILDER WIRING Rear of Frame; Includes Sealed Connectors for Tail/Amber Turn/Marker/ Backup/ Accessory Power/Ground and Sealed Connector for Stop/Turn
8HAH	ELECTRIC TRAILER BRAKE/LIGHTS Accommodation Package to Rear of Frame; for Combined Trailer Stop, Tail, Turn, Marker Light Circuits; Includes Electric Trailer Brake Accommodation Package with Cab Connections for Mounting Customer Installed Electric Brake Unit, Less Trailer Socket
8MMG	BATTERY SYSTEM {Deka/EAST PENN 9A31 AGM} Maintenance-Free, (3) AGM 12-Volt 2775CCA Total, Top Threaded Stud
8RGA	2-WAY RADIO Wiring Effects; Wiring with 20 Amp Fuse Protection, Includes Ignition Wire with 5 Amp Fuse, Wire Ends Heat Shrink and Routed to Center of Header Console in Cab
8RMP	RADIO AM/FM/WB/Clock/Auxiliary Input
8RMZ	SPEAKERS (2) 6.5" Dual Cone Mounted in Both Doors, (2) 5.25" Dual Cone Mounted in Both B-Pillars

<u>Code</u>	<u>Description</u>
8RNC	CB RADIO Accommodation Package; Header Mounted; Feeds From Accessory Side of Ignition Switch; Includes Power Source and Two (2) Antennas, Antenna Bases with Wiring on Both Side Mirrors
8THB	BACK-UP ALARM Electric, 102 dBA
8TKK	TRAILER AUXILIARY FEED CIRCUIT for Electric Trailer Brake Accommodation/Air Trailer ABS; with 30 Amp Fuse and Relay, Controlled by Ignition Switch
8TNP	AUXILIARY HARNESS 5.0' for Auxiliary Front Head Lights and Turn Signals for Front Plow Applications
8VUK	BATTERY BOX Aluminum, with Plastic Cover, 18" Wide, 2-4 Battery Capacity, Mounted Right Side Back of Cab
8VZP	BEACON MOUNTING BRACKET Cab Provision Includes Roof Fairing Extender Brackets for Use with Customer Lighting
8WGL	WINDSHIELD WIPER SPD CONTROL Force Wipers to Slowest Intermittent Speed When Park Brake Set and Wipers Left on for a Predetermined Time
8WMA	SWITCH, TOGGLE, FOR WORK LIGHT Lighted; on Instrument Panel and Wiring Effects for Customer Furnished Back of Cab Light
8WPH	CLEARANCE/MARKER LIGHTS (5) {Truck Lite} Amber LED Lights, Flush Mounted on Cab or Sunshade
8WPZ	TEST EXTERIOR LIGHTS Pre-Trip Inspection will Cycle all Exterior Lamps Except Back-up Lights
8WRB	HEADLIGHTS ON W/WIPERS Headlights Will Automatically Turn on if Windshield Wipers are turned on
8WWJ	INDICATOR, LOW COOLANT LEVEL with Audible Alarm
8WXD	ALARM, PARKING BRAKE Electric Horn Sounds in Repetitive Manner When Vehicle Park Brake is "NOT" Set, with Ignition "OFF" and any Door Opened
8WXG	STARTING MOTOR {Mitsubishi Electric Automotive America 105P} 12-Volt, with Soft-Start
8XAH	CIRCUIT BREAKERS Manual-Reset (Main Panel) SAE Type III with Trip Indicators, Replaces All Fuses
8XGT	TURN SIGNALS, FRONT Includes LED Side Turn Lights Mounted on Fender
8XHN	HORN, AIR Black, Single Trumpet, with Lanyard Pull Cord
8XHR	POWER SOURCE, ADDITIONAL Auxiliary Power Outlet (APO) & USB Port, Located in the Instrument Panel
9585	FENDER EXTENSIONS Rubber
9AAB	LOGOS EXTERIOR Model Badges
9AAE	LOGOS EXTERIOR, ENGINE Badges
9HBM	GRILLE Stationary, Chrome
9HBN	INSULATION, SPLASH PANELS for Sound Abatement
9WAC	BUG SCREEN Mounted Behind Grille
9WBC	FRONT END Tilting, Fiberglass, with Three Piece Construction, for WorkStar/HV
10022	CHASSIS COATING Corrosion Resistant E-Coat Primer Coating for Reinforced Frame Rails
10060	PAINTE SCHEMATIC, PT-1 Single Color, Design 100
	<u>Includes</u>
	: PAINT SCHEMATIC ID LETTERS "WL"
10761	PAINT TYPE Base Coat/Clear Coat, 1-2 Tone
10NZL	SPECIAL RATING, GVWR Limited to 80,000-lb GVWR

<u>Code</u>	<u>Description</u>
10SLV	PROMOTIONAL PACKAGE Government Silver Package
10WCY	SAFETY TRIANGLES
10XAN	FIRE EXTINGUISHER 5 lb Class A B C
10XAP	FIRE EXTINGUISHER BRACKET Mounted Left Side Driver Seat
11001	CLUTCH Omit Item (Clutch & Control)
12703	ANTI-FREEZE Red, Extended Life Coolant; To -40 Degrees F/ -40 Degrees C, Freeze Protection
12EHY	ENGINE, DIESEL {Cummins L9 370} EPA 2017, 370HP @ 2000 RPM, 1250 lb-ft Torque @ 1400 RPM, 2100 RPM Governed Speed, 370 Peak HP (Max)
12THT	FAN DRIVE {Horton Drivemaster} Direct Drive Type, Two Speed with Residual Torque Device for Disengaged Fan Speed <u>Includes</u> : FAN Nylon
12UYH	RADIATOR Aluminum; Cross Flow, Front to Back Series System, 1469 SqIn, with 1172 SqIn Charge Air Cooler <u>Includes</u> : DEAERATION SYSTEM with Surge Tank : HOSE CLAMPS, RADIATOR HOSES Gates Shrink Band Type; Thermoplastic Coolant Hose Clamps : RADIATOR HOSES Premium, Rubber
12VBB	AIR CLEANER Dual Element
12VGZ	FEDERAL EMISSIONS {Cummins L9} EPA, OBD and GHG Certified for Calendar Year 2019
12VXT	THROTTLE, HAND CONTROL Engine Speed Control; Electronic, Stationary, Variable Speed; Mounted on Steering Wheel
12VYL	ACCESSORY WIRING, SPECIAL for Road Speed Wire Coiled Under Instrument Panel for Customer Use
12WBR	FAN OVERRIDE Manual; with Electric Switch on Instrument Panel, (Fan On with Switch On)
12WZE	EMISSION COMPLIANCE Federal, Does Not Comply with California Clean Air Idle Regulations
12XAT	ENGINE CONTROL, REMOTE MOUNTED Provision for; Includes Wiring for Body Builder Installation of PTO Controls; with Ignition Switch Control for Cummins ISB/B6.7 or ISL/L9 Engines
13AUW	TRANSMISSION, AUTOMATIC {Allison 4500 RDS} 5th Generation Controls, Wide Ratio, 6-Speed with Double Overdrive, with PTO Provision, Less Retarder, Includes Oil Level Sensor, On/Off Highway
13WAW	OIL COOLER, AUTO TRANSMISSION {Modine} Water to Oil Type
13WEH	AUTOMATIC NEUTRAL Allison WT Transmission Shifts to Neutral When Parking Brake is Engaged and Remains in Neutral When Parking Brake is Disengaged, without On/Off Switch
13WET	TRANSMISSION SHIFT CONTROL for Column Mounted Stalk Shifter
13WLM	TRANSMISSION OIL Synthetic; 63 thru 76 Pints
13WUS	ALLISON SPARE INPUT/OUTPUT for Rugged Duty Series (RDS); General Purpose Trucks Modified for Single Input Auto Neutral
13WYH	TRANSMISSION TCM LOCATION Located Inside Cab
13WYU	SHIFT CONTROL PARAMETERS Allison 3000 or 4000 Series Transmissions, 5th Generation Controls, Performance Programming
13XAL	PTO LOCATION Customer Intends to Install PTO at Left Side of Transmission

<u>Code</u>	<u>Description</u>
14HRE	AXLE, REAR, TANDEM {Meritor RT-46-164P} Single Reduction, Standard Width, 46,000-lb Capacity, with Lube Oil Pump, Driver Controlled Locking Differential in Forward-Rear and Rear-Rear Axle, 200 Wheel Ends . Gear Ratio: 5.38
14RAB	AXLE, LIFT, CONTROLS for One Lift Axle; Controls Inside And Outside Cab; Includes Pressure Gauge and Lift/Lower Switch Inside Cab; Pressure Gauge and Pressure Regulator Outside Cab
14UAA	AXLE SPACING, FIRST PUSHER 45" Ahead of Drive Axle
14JLY	SUSPENSION, REAR, TANDEM {Hendrickson HMX-460-54} Walking Beam, 46,000-lb Capacity, 54" Axle Spacing, Rubber Springs, with Transverse Torque Rods, Rubber End Bushings
14WAL	SUSPENSION/REAR-AXLE IDENTITY for Meritor Tandem Rear Axles with Bar-Pin Beam Attachment Type Suspensions
14WBN	DIFF. SWITCH CONTROLS Two Independent Switches for Control Traction Differentials on Tandem Rear Axles, Mounted on Dash
14WBV	SHOCK ABSORBERS, REAR (4) for Hendrickson HMX Suspension Only, Mounted from Frame to Beam
14WNH	AXLE, PUSHER, LIFT TYPE {Watson & Chalin SL1190SSR Tru-Trk Alumilite} 13,500-lb Capacity, One Self-Steer Axle
14WZY	AXLE SHAFT MODIFICATION Axle Shaft Flanges Modified for 0.625" Diameter Drive Studs with Solid Type Cone-Locks
15924	FUEL TANK STRAPS Bright Finish Stainless Steel
15DYP	DEF TANK 9.5 US Gal (36L) Capacity, Frame Mounted Outside Left Rail, Under Cab
15LMA	LOCATION FUEL/WATER SEPARATOR Mounted Outside Left Rail, 15" Back of Cab
15LMR	FUEL/WATER SEPARATOR {Racor 400 Series,} with Primer Pump, Includes Water-in-Fuel Sensor
15SWG	FUEL TANK Top Draw, Polished Aluminum, 26" Dia, 70 US Gal (265L), Mounted Left Side, Under Cab
16030	CAB Conventional, Day Cab
16BAM	AIR CONDITIONER with Integral Heater and Defroster
16GDC	GAUGE CLUSTER Base Level; English with English Speedometer and Tachometer, for Air Brake Chassis, Includes Engine Coolant Temperature, Primary and Secondary Air Pressure, Fuel and DEF Gauges, Oil Pressure Gauge, Includes 3 Inch Monochromatic Text Display
16GHU	GRAB HANDLE, CAB INTERIOR (2) Safety Yellow
16HGH	GAUGE, OIL TEMP, AUTO TRANS for Allison Transmission
16HGN	GAUGE, AIR APPLICATION
16HHE	GAUGE, AIR CLEANER RESTRICTION {Filter-Minder} with Black Bezel, Mounted in Instrument Panel
16HKT	IP CLUSTER DISPLAY On Board Diagnostics Display of Fault Codes in Gauge Cluster
16HLX	GAUGE, VOLTMETER Auxiliary Gauge, Located in Center Panel. Standard Cluster Also Includes Digital Voltage Readout
16LER	SEAT, PASSENGER {National} Air-Suspension, High Back with Integral Headrest, Mordura Cloth, Isolated, 1 Chamber Lumbar, 2 Position Front Cushion Adjust, -3 to +14 Degree Back Angle Adjustment
16LSD	SEAT, DRIVER {National 2000} Air Suspension, High Back with Integral Headrest, Mordura Cloth, Isolated, with 2 Position Front Cushion Adjustment, -3 to +14 Degree Seat Back Adjustment, Single Chamber Air Lumbar Support
16SNX	MIRROR, CONVEX, LOOK DOWN Right Side, Bright, 6" x 10.5"

<u>Code</u>	<u>Description</u>
16SPJ	MIRRORS (2) C-Loop, Power Adjust, Heated, LED Clearance Lights, Bright Heads and Arms, 7" x 14.5", Includes 8" x 6" Convex Mirrors, for 96" Load Width
	<u>Notes</u> : Mirror Dimensions are Rounded to the Nearest 0.5"
16VCC	SEAT BELT All Orange; 1 to 3
16VHX	CAB MOUNTING HEIGHT EFFECTS High Cab in Lieu of Mid High Cab Mounting (Approx. 4.5")
16VKB	CAB INTERIOR TRIM Classic, for Day Cab
	<u>Includes</u> : CONSOLE, OVERHEAD Molded Plastic with Dual Storage Pockets, Retainer Nets and CB Radio Pocket; Located Above Driver and Passenger : DOME LIGHT, CAB Door Activated and Push On-Off at Light Lens, Timed Theater Dimming, Integral to Overhead Console, Center Mounted : SUN VISOR (2) Padded Vinyl; 2 Moveable (Front-to-Side) Primary Visors, Driver Side with Toll Ticket Strap
16VSL	WINDSHIELD Heated, Single Piece
16WBY	ARM REST, RIGHT, DRIVER SEAT
16WBZ	ARM REST, LEFT, PASSENGER SEAT
16WHJ	HOSE CLAMPS, HEATER HOSE {Breeze} Belleville Washer Type
16WJU	WINDOW, POWER (2) and Power Door Locks, Left and Right Doors, Includes Express Down Feature
16WSK	CAB REAR SUSPENSION Air Bag Type
16XJP	INSTRUMENT PANEL Wing Panel
16XXC	COWL TRAY LID
16ZBT	ACCESS, CAB Steel, Driver & Passenger Sides, Two Steps per Door, for use with Day Cab and Extended Cab
27DPN	WHEELS, FRONT {Accuride 29039} DISC; 22.5x9.00 Rims, Powder Coat Steel, 5-Hand Hole, 10-Stud, 285.75mm BC, Hub-Piloted, Flanged Nut, with Steel Hubs, Non-Standard Offset, with .5" Thick Disc
28DUK	WHEELS, REAR {Accuride 29169} DUAL DISC; 22.5x8.25 Rims, Powder Coat Steel, 5-Hand Hole, 10-Stud, 285.75mm BC, Hub-Piloted, Flanged Nut, with .472" Thick Increased Capacity Disc and Steel Hubs
29WAP	WHEEL GUARDS, FRONT {Accuride} for Metric Hub Piloted Wheels with Flanged Mounting Nuts Mounted Between Hub and Wheel
29WAR	WHEEL GUARDS, REAR {Accuride} for Metric Hub Piloted Wheels with Flanged Mounting Nuts, Mounted Between Hub & Wheel and Between Dual Wheels
34ACJ	WHEELS, LIFT AXLE PUSHER {Accuride 51408} Single Wheels, For One Lift Axle; 22.5x8.25 Rims, Powder Coat Steel, 2-Hand Hole, 10-Stud, 285.75mm BC, Hub-Piloted, Flanged Nut << Pricing Includes Standard Tires >>
60AAH	BDY INTG, REMOTE POWER MODULE (2) Mounted Inside Cab Behind Driver Seat, Up to 6 Outputs & 6 Inputs Each, Max 20 amp per Channel, Max 80 amp Total; Includes 2 Switch Packs with Latched Switches
7372138132	(8) TIRE, REAR 11R22.5 Load Range G ENDURANCE RSA (GOODYEAR), 496 rev/mile, 75 MPH, All-Position
7702495439	(2) TIRE, PUSHER 295/75R22.5 Load Range G HSR 3 (CONTINENTAL), 514 rev/mile, 75 MPH, All-Position
7792545437	(2) TIRE, FRONT 315/80R22.5 Load Range L HAU 3 WT (CONTINENTAL), 480 rev/mile, 68 MPH, All-Position
OBD001	BRAKE CHAMBERS, REAR AXLE brake chambers rear axle

Services Section:

<u>Code</u>	<u>Description</u>
40128	WARRANTY Standard for HV507, HV50B, HV607 Models, Effective with Vehicles Built July 1, 2017 or Later, CTS-2025A
1	Enoven Truck Body Quote 74399 Hookloader: Ampliroll AL160/2000-22 Accessories: Rear Bumper Cab Guard Accessories: Tandem Axle Poly Fender Accessories: Toolbox, 48" Accessories: Henke Front Parallel Lift Plow Accessories: Henke Underbody Scraper Accessories: Plow Lamps Sand Spreader: Henke High Volume Liquid, Hookloader Install Body Connections

<u>Description</u>	<u>(US DOLLAR)</u>	<u>Price</u>
Factory List Prices:		
Product Items	\$202,621.00	
Service Items	\$0.00	
Total Factory List Price Including Options:		\$202,621.00
Freight	\$2,350.00	
Total Freight:		\$2,350.00
Total Factory List Price Including Freight:		\$204,971.00
Less Customer Allowance:		(\$74,169.37)
Total Vehicle Price:		\$130,801.63
Total Body/Allied Equipment:		\$205,890.00
Total Sale Price:		\$336,691.63
Total Per Vehicle Sales Price:		\$336,691.63
Net Sales Price:		\$336,691.63

Please feel free to contact me regarding these specifications should your interests or needs change. I am confident you will be pleased with the quality and service of an International vehicle.

Approved by Seller:

Accepted by Purchaser:

Official Title and Date

Firm or Business Name

Authorized Signature

Authorized Signature and Date

This proposal is not binding upon the seller without Seller's Authorized Signature

Official Title and Date

The TOPS FET calculation is an estimate for reference purposes only. The seller or retailer is responsible for calculating and reporting/paying appropriate FET to the IRS.

The limited warranties applicable to the vehicles described herein are Navistar, Inc.'s standard printed warranties which are incorporated herein by reference and to which you have been provided a copy and hereby agree to their terms and conditions.